INA6017AM1

FOR LOW FREQUENCY AMPLIFY APPLICATION SILICON PNP EPITAXIAL TYPE

DESCRIPTION

INA6017AM1 is a silicon PNP transistor.


It is designed with high voltage.

FEATURE

- ·Small package for easy mounting.
- •High voltage $V_{CEO} = -150V$
- •Low voltage VCE(sat) = −0.2V(MAX)


APPLICATION

High voltage switching.

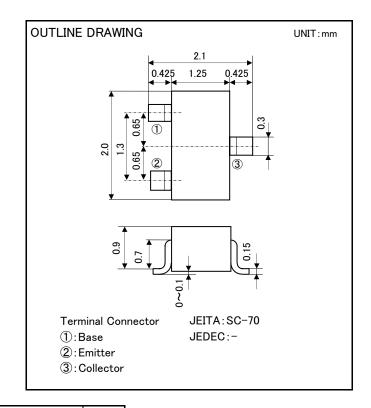

MAXIMUM RATING (Ta=25°C)

SYMBOL	PARAMETER	RATING	UNIT
V _{CBO}	Collector to Base voltage	-160	V
V_{EBO}	Emitter to Base voltage	-5	V
V _{CEO}	Collector to Emitter voltage	-150	V
I _{CM}	Peak collector current	-200	mA
Ιc	Collector current	-100	mA
P _c	Collector dissipation(Ta=25°C)	200	mW
T _j	Junction temperature	+150	°C
T_{stg}	Storage temperature	-55 ~ +150	°C




ELECTRICAL CHARACTERISTICS (Ta=25°C)

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	UNIT
V _{(BR)CBO}	C to B breakdown voltage	I _c =-100uA, I _E =0	-160	-	ı	V
V _{(BR)EBO}	E to B breakdown voltage	I_{e} =-10uA, I_{c} =0	-5	-	-	V
V _{(BR)CEO}	C to E breakdown voltage	I _c =-1mA, R _{BE} =∞	-150	-	-	V
I _{CBO}	Collector cut off current	V _{CB} =-120V, I _E =0	-	-	-100	nA
I _{EBO}	Emitter cut off current	V_{EB} =-3V, I $_{C}$ =0	-	-	-100	nA
hFE1	DC forward current gain1	VCE=-5V, I _c =-1mA	150	-	-	-
hFE2	DC forward current gain2	VCE=-5V, I _c =-10mA	200	-	500	-
hFE3	DC forward current gain3	VCE=-5V, I _c =-50mA	45	-	-	-
VCE(sat)	C to E saturation voltage	I _c =-10mA, I _B =-1mA	-	-	-0.2	V
VBE(sat)	B to E saturation voltage	I _c =-10mA, I _B =-1mA	-	-	-1.0	V
fT	Gain bandwidth product	VCE=-10V, I _E =10mA	ı	130	-	MHz
Cob	Collector output capacitance	VCB=-10V, I _e =0, f=1MHz	-	3	_	pF

INA6017AM1

FOR LOW FREQUENCY AMPLIFY APPLICATION SILICON PNP EPITAXIAL TYPE

TYPICAL CHARACTERISTICS

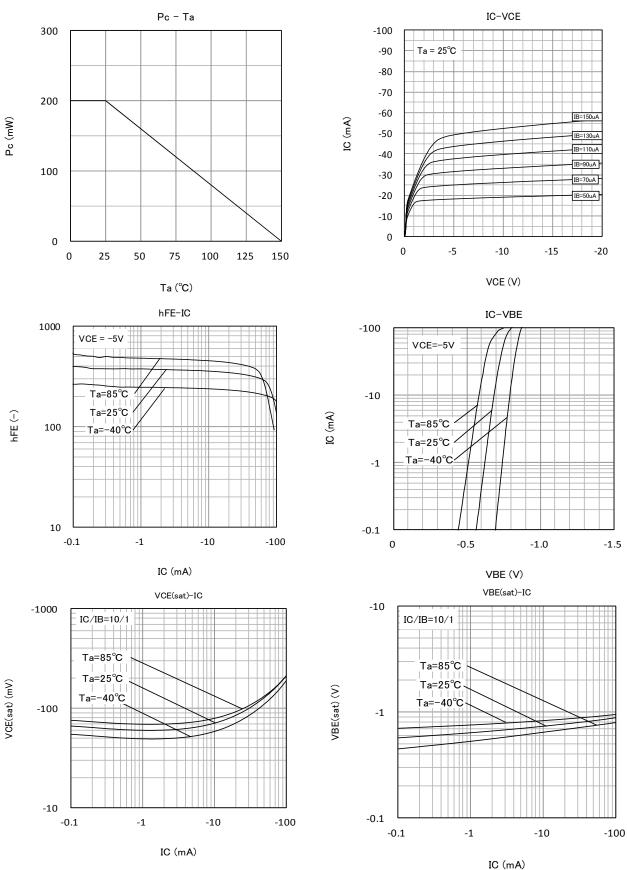



Keep safety first in your circuit designs!

-ISAHAYA Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1) placement of substitutive, auxiliary, (2) use of non-farmable material or (3) prevention against any malfunction or mishap.

Notes regarding these materials

- -These materials are intended as a reference to our customers in the selection of the ISAHAYA products best suited to the customer's application; they don't convey any license under any intellectual property rights, or any other rights, belonging ISAHAYA or third party. ISAHAYA Electronics Corporation assumes no responsibility for any damage, or infringement of any third party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by ISAHAYA Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for the latest product information before purchasing product listed herein.
- ISAHAYA Electronics Corporation products are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of ISAHAYA Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact ISAHAYA Electronics Corporation or authorized ISAHAYA products distributor for further details on these materials or the products contained therein.