

RT8H151C

Window comparator circuit

DESCRIPTION

RT8H151C is composed by NPN transistors,PNP transistors and resistors.It can miniaturization of a set and reduce parts or time necessary for completion. RT8H151C constitutes the window comparator circuit.

FEATURES


- Miniaturization of a set.
- External setting of a detection voltage is possible with the detection voltage setting terminals (VIN1, VIN2)
- Open collector output

APPLICATION

- Window type voltage detection circuit

OUTLINE DRAWING


Unit : mm

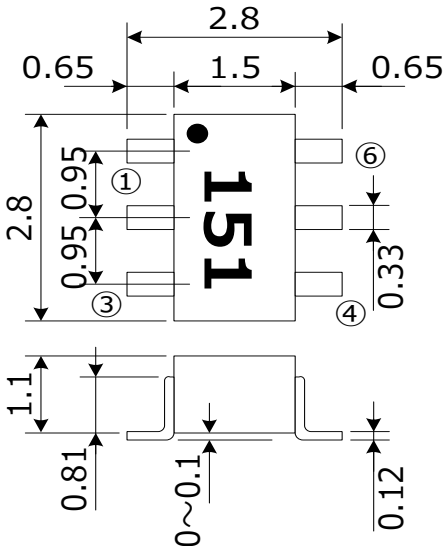

PIN CONFIGURATION

- | | |
|-------|------|
| ①OUT | ⑥VCC |
| ②VIN1 | ⑤GND |
| ③VIN2 | ④VS |

BLOCK DIAGRAM

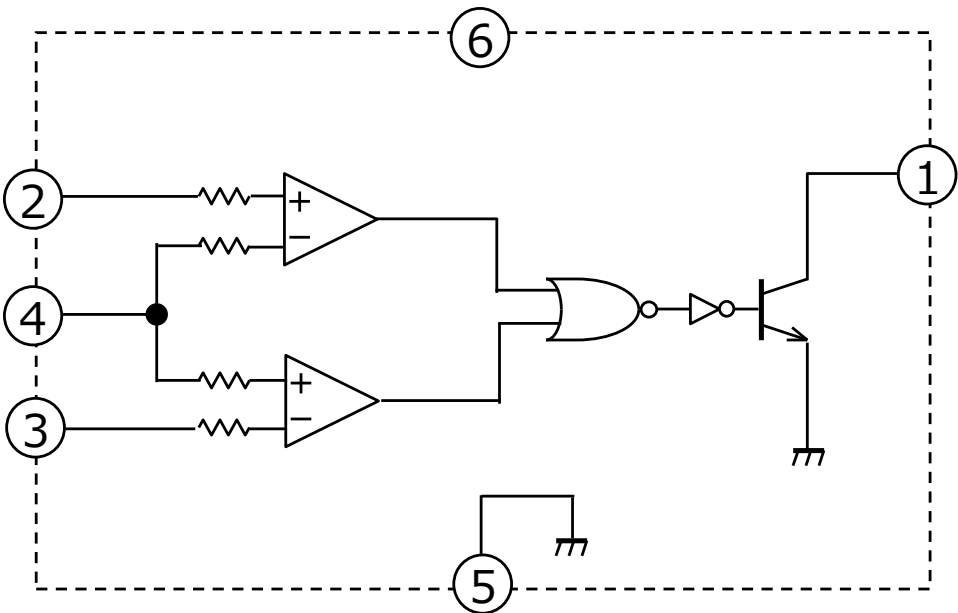

<MFT>

RT8H151C

Window comparator circuit


ABSOLUTE MAXIMUM RATINGS (Ta=25℃)

Symbol	Parameter	Conditions	Ratings	Unit
VCC	Supply voltage		18	V
VIN	VIN1,VIN2 Input voltage		-0.3~VCC	V
VS	VS Input voltage		-0.3~VCC	V
Pd	Internal power dissipation		200	mW
Kθ	Thermal derating	Ta≥25℃	1.6	mW/℃
Tj	Junction temperature		150	℃
Tstg	Storage temperature	(keep dry)	−40~150	℃
Topr	Operating temperature	(keep dry)	−20~85	℃

ELECTRICAL CHARACTERISTIC (Ta=25℃,VCC=5V unless otherwise noted.)

Symbol	Parameter	Test condition	Designed value			Unit
			Min	Typ	Max	
VCC	Operating supply voltage range		3		17	V
ICC	Circuit current	VIN2=3V,VIN1=1V,VS=0V		500		uA
VIN	VIN1,2 Common-mode input voltage range		0		VCC-1.5	V
VS1	Detection voltage1	VIN2=3V,VIN1=1V,RL=5.1KΩ		1.00		V
VS2	Detection voltage2	VIN2=3V,VIN1=1V,RL=5.1KΩ		3.00		V
IBIN1	VIN1 bias current	VIN2=3V,VIN1=1V,VS=2.5V			150	nA
IBIN2	VIN2 bias current	VIN2=3V,VIN1=1V,VS=3.5V			150	nA
IBVS	VS bias current	VIN2=3V,VIN1=1V,VS=0V			300	nA
tr	Response time	RL=5.1KΩ,VRL=5V	-	6.0	-	usec
VOSAT	Output saturation voltage	VIN2=3V,VIN1=1V,VS=0V,RL=5.1KΩ	-	0.2	0.4	V
IOL	Output leak current	VIN2=3V,VIN1=1V,VS=2.5V,VO=18V	-	-	1	uA






CHARACTERISTICS

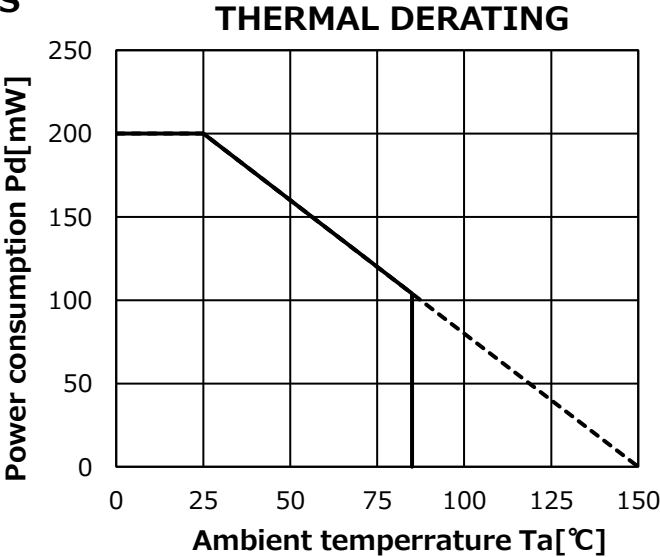

RT8H151C

Window comparator circuit

REFERENCE DATA

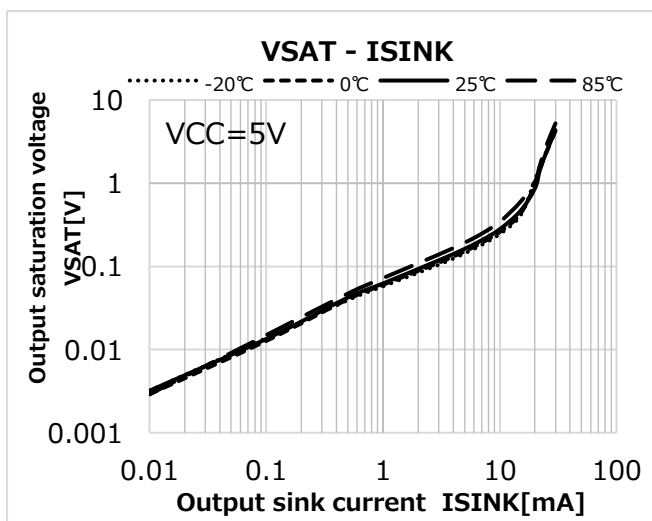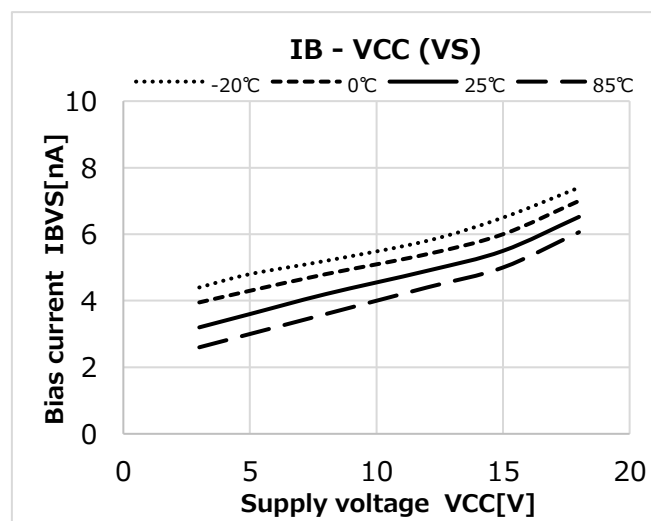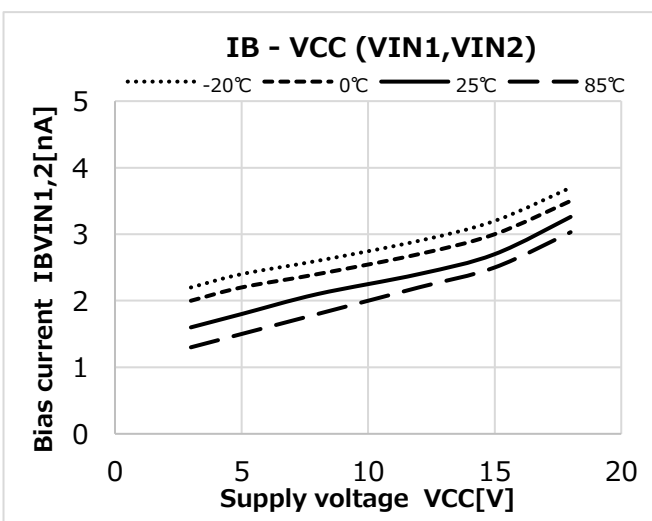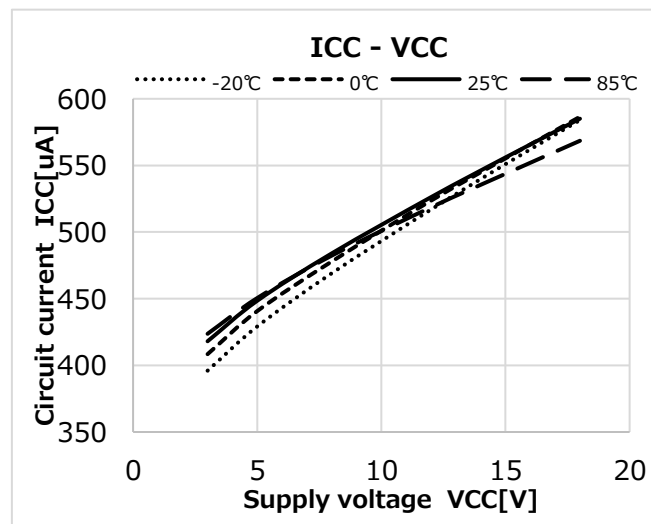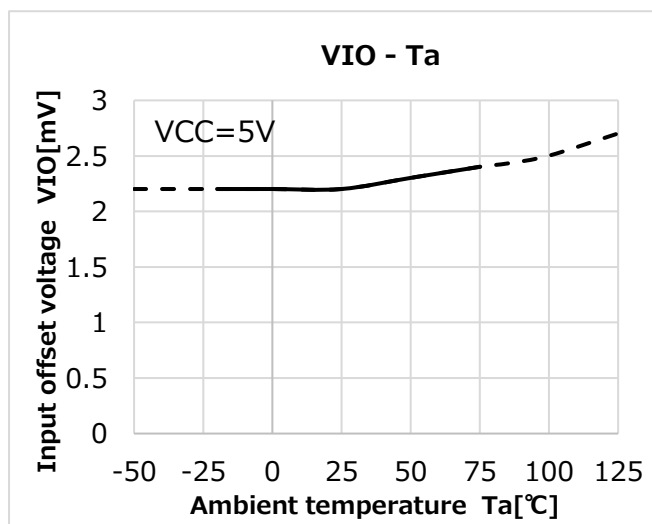


<MFT>

RT8H151C


Window comparator circuit

REFERENCE DATA


Response time measurement circuit

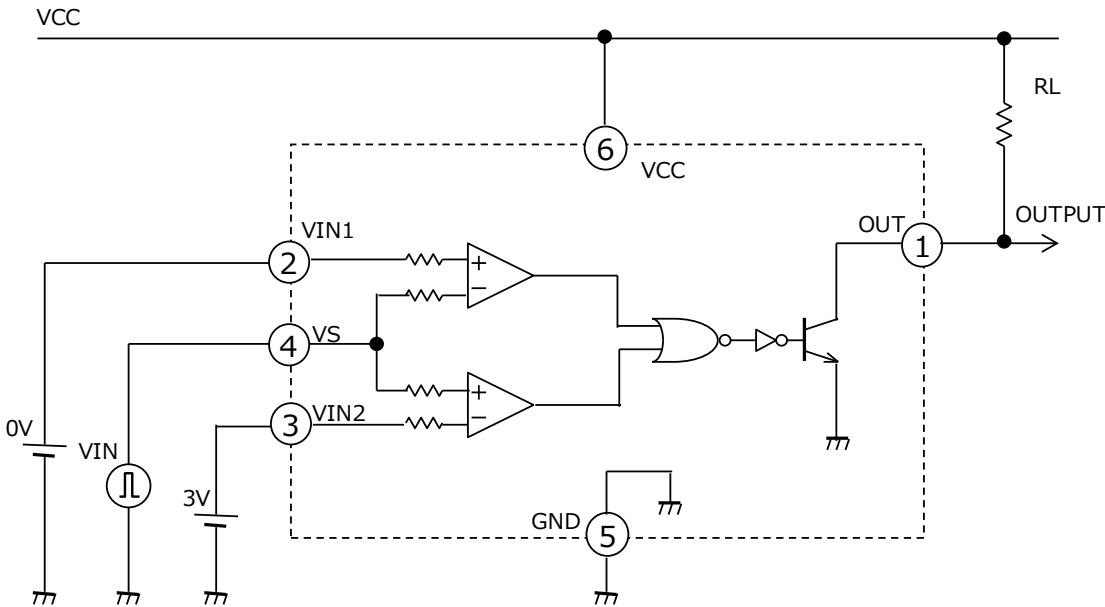


Rise response time
VCC=5V,RL=5.1k Ω ,Ta=25 $^{\circ}$ C

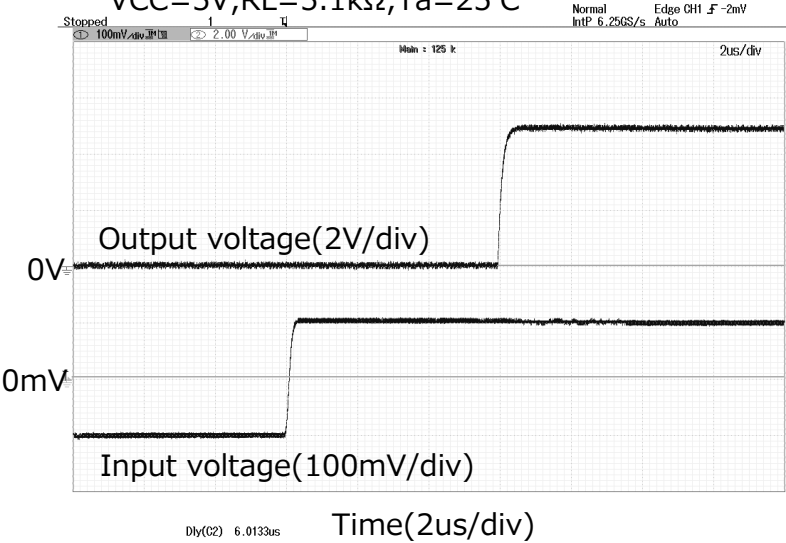

Fall response time
VCC=5V,RL=5.1k Ω ,Ta=25 $^{\circ}$ C

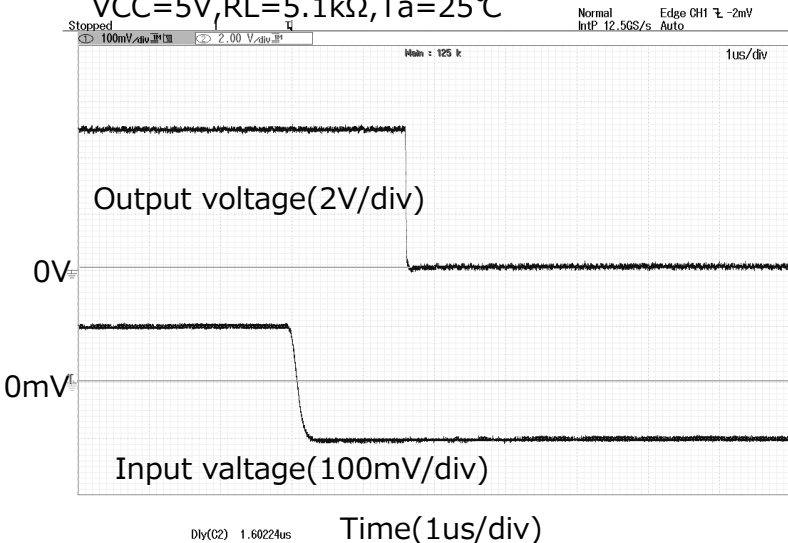


APPLICATION CIRCUIT EXAMPLES

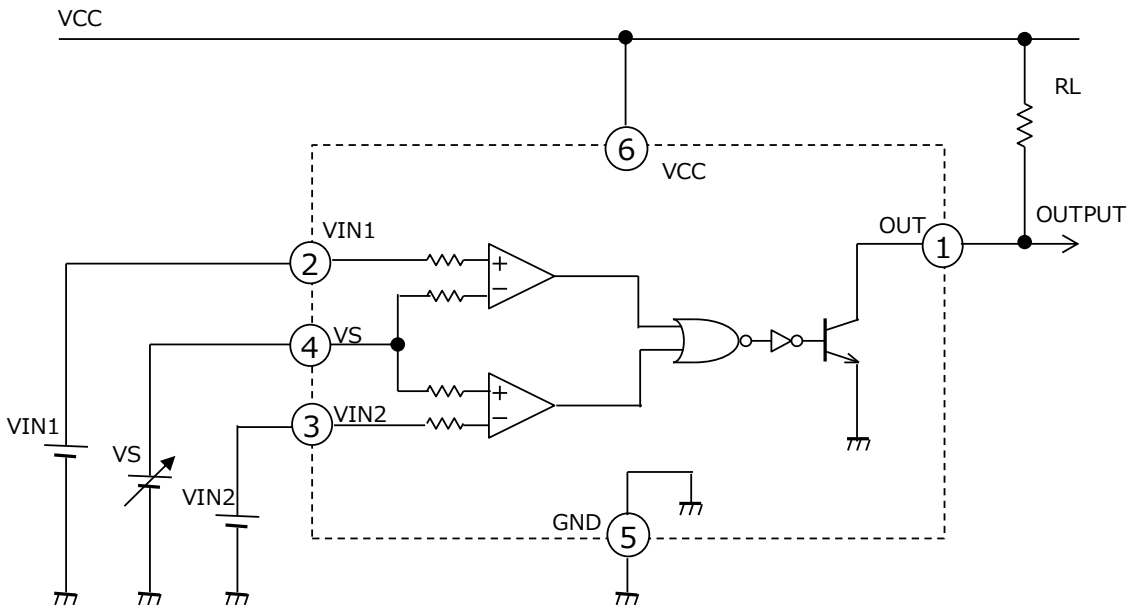

* 1. Please set VIN1 and VIN2 set voltage so that VIN1<VIN2.

TIMING CHART

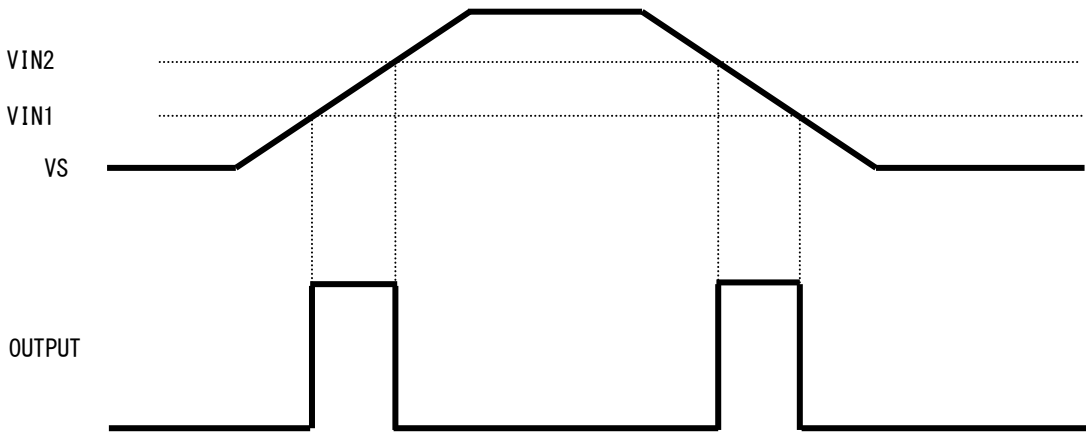

Keep safety first in your circuit designs!

·ISAHAYA Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1) placement of substitutive, auxiliary, (2) use of non-flammable material or (3) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to our customers in the selection of the ISAHAYA products best suited to the customer's application; they don't convey any license under any intellectual property rights, or any other rights, belonging ISAHAYA or third party.
- ISAHAYA Electronics Corporation assumes no responsibility for any damage, or infringement of any third party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by ISAHAYA Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for the latest product information before purchasing product listed herein.
- ISAHAYA Electronics Corporation products are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of ISAHAYA Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact ISAHAYA Electronics Corporation or authorized ISAHAYA products distributor for further details on these materials or the products contained therein.